

www.licon.com.tr





ABOUT US

With over 40 years of experience in the electronics sector, our team has focused its extensive expertise on the lighting industry. In an era where efficient, long-lasting, and aesthetically pleasing new generation lighting is made possible with electronic chip materials, we are proud to present a reliable brand that fully reflects our experience in our products and to our customers.

LICON designs its products by considering the biological, physical, and psychological effects of light on living beings, the aesthetics of both open and closed spaces, and the functional lighting standards based on usage areas and purposes.

To produce the most efficient, aesthetic, and long-lasting lighting solutions, our dynamic team of experienced engineers continues to invest tirelessly in R&D and quality, adding a new technological product every day. They have consolidated the address and brand of lighting in LICON.

Our products are categorized under two main headings: Indoor Lighting and Outdoor Lighting. Indoor Lighting includes offices, stores, warehouses, factory areas, and indoor sports fields. Outdoor Lighting covers streets, squares, open areas, parks, gardens, sports fields, and tunnel lighting.

Licon Energy Industry and Trade Limited Company

CONTENTS

ADOUL US	
Street Lighting Series	4
GTD-30S	5
GTD-150S	8
GTD-05S	11
Park Garden Lighting Series	13
GTD-02PB	14
GTD-03PB	16
GTD-05PB	18
Projector Series	20
GTD-03P	21
GTD-03PX2	24
GTD-05P	26
GTD-07P	29
Canopi Series	32
GTD-05KP	33
High Bay Lighting Series	35
GTI-HB	36
GTI-ETX2	38
GTD-05ED	40
Suspended Ceiling Lighting Series	42
GTI-AT	43

CONTENTS

Surface Mounted Lighting Series GTI-SU	45 46
Drywall Lighting Series GTI-AP	48 49
Clipin Lighting Series GTI-CP	51 52
Linear Lighting Series GTI-ET	54 55
GTI-ET01	55 57
GTI-LN	59
GTI-LN S	61
GTI-CLK	63
DMX Linear Lighting Series	65
GTI-DMX	66
Emergency Lighting Series	68
GTI-ACI	69



Our Street Lighting Series LED floodlights, which prioritize the safety and aesthetics of your cities, offer an economical and environmentally friendly option with energy efficiency. Illuminate every corner of your city with Licon Energy's lighting solutions equipped with advanced technology. Light up the cities of the future.



GTD-30S is a product that meets the highest standards in street lighting. It provides safe and effective lighting with its powerful light emitting capacity and longlasting LED technology.

Options

• Emergency Kit: Yes(1-3 hours)

• Dimming Protocol: Suitable

STREET LIGHTING GTD 30S

GTD-30S40 GTD-30S60 GTD-30S75 GTD-30S100 GTD-30S90















Technical Specifications

- Product body; aluminum injection
- Excellent thermal performance
- Lifetime: >50,000 hours, PF: >95%
- 90° adjustable mounting angle
- Input Voltage: 220-240V Frequency: 50-60 Hz
- Color rendering ind. (CRI): >70
- Power factor: >0.95
- 3 year warranty.

Areas of Use


City Roads **Building Environments** Squares **Public Parking Lots Parks**

PRODUCT CODE	POWER (W)	LUMINOUS FLUX (Im)	COLOR TEMPERATURE (K)	PRODUCT WEIGHT (kg)	PRODUCT SIZES (mm)	GROSS WEIGHT (kg)	BOX SIZES (mm)
GTD-S-30S40	40	5400	3000-6500	3,7	292*485*98	4,2	300*490*100
GTD-S-30S60	60	8100	3000-6500	3,9	292*485*98	4,2	300*490*100
GTD-S-30S75	75	10125	3000-6500	4,1	292*485*98	4,2	300*490*100
GTD-S-30S90	90	12150	3000-6500	4,2	292*485*98	4,2	300*490*100
GTD-S-30S100	100	18225	3000-6500	4,2	292*485*98	4,2	300*490*100







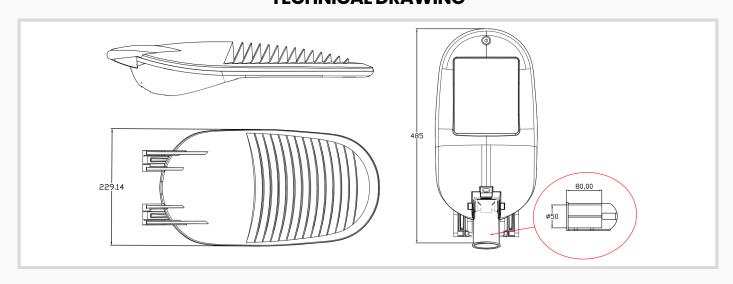

18°	30°	60°	90°	120°	Asymmetric
-----	-----	-----	-----	------	------------



GTD-150S is a product that meets the highest standards in street lighting. It provides safe and effective lighting with its powerful light emitting capacity and long-lasting LED technology.

Opsiyonlar

- Emergency Kit: Yes (1-3 hours)
- Dimming Protocol: Available

STREET LIGHTING GTD 150S

GTD-150S100

GTD-150S125

GTD-150S150















Teknik Özellikler

- Product body; aluminum injection
- Excellent thermal performance
- Lifetime: >50,000 hours, PF: >95%
- 90° adjustable mounting angle
- Input Voltage: 220-240V Frequency: 50-60 Hz
- Color rendering ind. (CRI): >70
- Power factor: >0.95
- 3 year warranty.

Areas of Use

Urban Roadways

Building Environments

Parks

Squares

Public Parking Lots

PRODUCT CODE	Power (W)	LUMINOUS FLUX (Im)	COLOR TEMPERATURE (K)	PRODUCT WEIGHT (kg)	PRODUCT DIMENSIONS (mm)	GROSS WEIGHT (kg)	BOX DIMENSIONS (mm)
GTD-S-150S100	100	13500	3000-6500	6,7	295*620*152	7,3	670*335*190
GTD-S-150S125	125	16875	3000-6500	6,7	295*620*152	7,3	670*335*190
GTD-S-150S150	150	20250	3000-6500	6,7	295*620*152	7,3	670*335*190



GTD-150S is a product that meets the highest standards in street lighting. It provides safe and effective lighting with its powerful light emitting capacity and long-lasting LED technology.

Opsiyonlar

• Emergency Kit: Yes (1-3 hours)

• Dimming Protocol: Available

STREET LIGHTING **GTD 150S**

GTD-150S100

GTD-150S125

GTD-150S150

GTD-150S170















Technical Specifications

- Product body; aluminum injection
- Tempered Glass
- Lighting Surge Protector: 5kV 20kV
- Excellent thermal performance
- Lifetime: >75,000 hours, PF: >95%
- 90° adjustable mounting angle
- Input Voltage: 180-240V Frequency: 50-60 Hz
- Color rendering ind. (CRI): >70
- Power factor: >0.95
- 3 year warranty.

Areas of Use

Urban Roadways

Building Environments

Parks

Squares

Public Parking Lots


PRODUCT CODE	Power (W)	LUMINOUS FLUX (Im)	COLOR TEMPERATURE (K)	PRODUCT WEIGHT (kg)	PRODUCT DIMENSIONS (mm)	GROSS WEIGHT (kg)	BOX DIMENSIONS (mm)
GTD-S-150S100	100	11700	3000-6500	6,7	295*620*152	7,3	670*335*190
GTD-S-150S125	125	14625	3000-6500	6,7	295*620*152	7,3	670*335*190
GTD-S-150S150	150	17550	3000-6500	6,7	295*620*152	7,3	670*335*190
GTD-S-150S170	170	19890	3000-6500	6,7	295*620*152	7,3	670*335*190









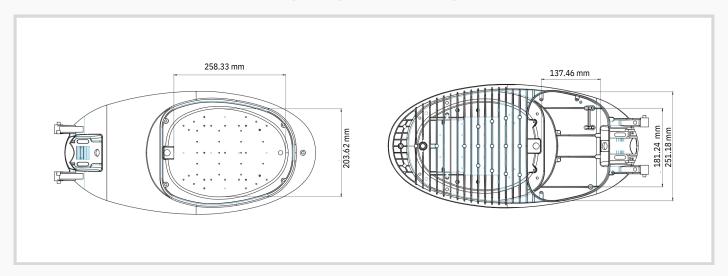

18°	30°	60°	90°	120°	Asymmetric
-----	-----	-----	-----	------	------------





GTD-05S is a product that meets the highest standards in street lighting. It provides safe and effective lighting with its powerful light emitting capacity and long-lasting LED technology.

Options

- Emergency Kit: Yes (1-3 hours)
- Dimming Protocol: Available

STREET LIGHTING **GTD 05S**

GTD-05S80	GTD-05S100	GTD-05S120
GTD-05S125	GTD-05S150	GTD-05\$180















Technical Specifications

- Product body; aluminum injection
- Excellent thermal performance
- Lifetime: >50,000 hours, PF: >95%
- 90° adjustable mounting angle
- Input Voltage: 220-240V Frequency: 50-60 Hz
- Color rendering ind. (CRI): >70
- Power factor: >0.95
- 3 year warranty.


Areas of Use

Urban Roadways Building Environments

> **Public Parking Lots Parks** Squares

PRODUCT CODE	POWER (W)	LUMINOUS FLUX (Im)	COLOR TEMPERATURE (K)	PRODUCT WEIGHT (kg)	ÜRÜN EBATLARI (mm)	GROSS WEIGHT (kg)	BOX SIZES (mm)
GTD-05\$80	80	1080	3000-6500	7,2	330*330*60	7,5	400*400*130
GTD-05S100	100	13500	3000-6500	7,2	330*330*60	7,5	400*400*130
GTD-05S120	120	16200	3000-6500	7,2	330*330*60	7,5	400*400*130
GTD-05S125	125	16875	3000-6500	7,2	330*330*60	7,5	400*400*130
GTD-05S150	150	20250	3000-6500	7,2	330*330*60	7,5	400*400*130
GTD-05\$180	180	24300	3000-6500	7,2	330*330*60	7,5	400*400*130



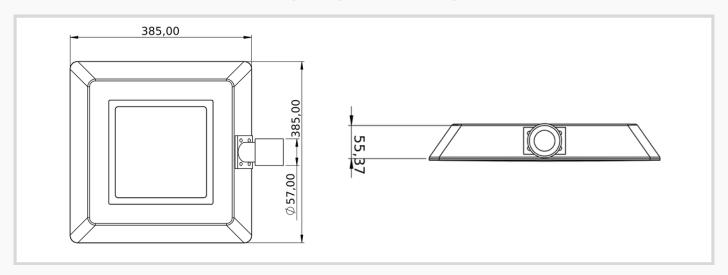

	18°	30°	60°	90°	120°	Asymmetric	
--	-----	-----	-----	-----	------	------------	--







GTD-02PB creates a pleasant atmosphere by creating natural light effects in park and garden areas. With its durable and weatherresistant structure, you can use it safely in any environment.

Options

• Emergency Kit: Yes (1-3 hours)

• Dimming Protocol: Available

PARK GARDEN LIGHTING SERIES GTD 02PB

GTD-02PB40

GTD-02PB60













Technical Specifications

- Product body; aluminum injection
- Excellent thermal performance
- Lifetime: >50,000 hours, PF: >95%
- Input Voltage: 220-240V Frequency: 50-60 Hz
- Color rendering ind. (CRI): >70
- Power factor: >0.95
- 3 year warranty.

Areas of Use

Building Environments Urban Roadways


Parks

Squares

Public Parking Lots

PRODUCT CODE	Power (W)	LUMINOUS FLUX (Im)	COLOR TEMPERATURE (K)	PRODUCT WEIGHT (kg)	PRODUCT DIMENSIONS (mm)	GROSS WEIGHT (kg)	BOX DIMENSIONS (mm)
GTD-02PB-40	40	14000	3000-6500	6,3	295*620*152	6,8	670*335*190
GTD-02PB-60	60	17000	3000-6500	6,3	295*620*152	6,8	670*335*190



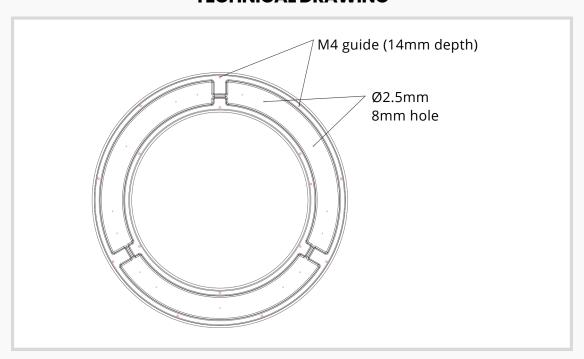





GTD-03PB creates a pleasant atmosphere by creating natural light effects in park and garden areas. You can use it safely in any environment with its durable and weatherresistant structure.

Options

• Emergency Kit: Yes (1-3 hours)

• Dimming Protocol: Available

PARK GARDEN LIGHTING SERIES GTD 03PB

GTD-03PB30

GTD-03PB45

GTD-03PB60















Technicial Specifications

• Product body; aluminum injection

• Excellent thermal performance

• Lifetime: >50,000 hours, PF: >95%

• Input Voltage: 220-240V Frequency: 50-60 Hz

Color rendering ind. (CRI): >70

• Power factor: >0.95

• 3 year warranty.

Areas of Use

Urban Roadways

Building Environments


Parks

Squares

Public Parking Lots

PRODUCT CODE	Power (W)	LUMINOUS FLUX (Im)	COLOR TEMPERATURE (K)	PRODUCT WEIGHT (kg)	PRODUCT SIZES (mm)	GROSS WEIGHT (kg)	BOX SIZES (mm)
GTD-03PB30	30	4050	3000-6500	6,5	725*725*600	7,2	740*740*615
GTD-03PB45	45	5400	3000-6500	6,5	725*725*600	7,2	740*740*615
GTD-03PB60	60	8100	3000-6500	6,5	725*725*600	7,2	740*740*615



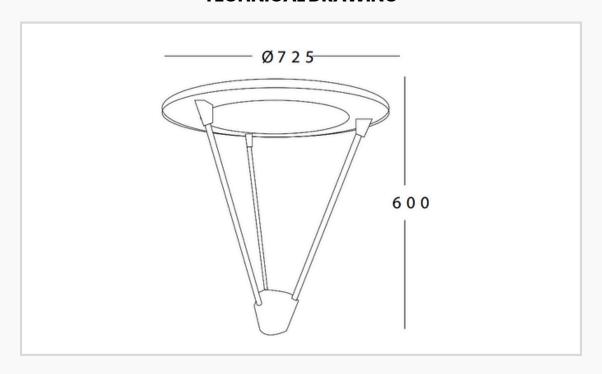





GTD-05PB creates a pleasant atmosphere by creating natural light effects in park and garden areas. You can use it safely in any environment with its durable and weatherresistant structure.

Options

• Emergency Kit: Yes (1-3 hours)

• Dimming Protocol: Available

PARK GARDEN LIGHTING SERIES GTD 05PB

GTD-05PB45

GTD-05PB60

GTD-05PB90















Technicial Specifications

- Product body; aluminum injection
- Excellent thermal performance
- Lifetime: >50,000 hours, PF: >95%
- Input Voltage: 220-240V Frequency: 50-60 Hz
- Color rendering ind. (CRI): >70
- Power factor: >0.95
- 3 year warranty.

Areas of Use

Urban Roadways


Building Environments


Parks

Squares

Public Parking Lots

PRODUCT CODE	POWER (W)	LUMINOUS FLUX (LM)	COLOR TEMPERATURE (K)	PRODUCT WEIGHT (KG)	PRODUCT DIMENSIONS (MM)	GROSS WEIGHT (KG)	BOX DIMENSIONS (MM)
GTD-05PB45	45	6075	3000-6500	11,0	450*396*82	11,7	570*570*300
GTD-03PB60	60	8100	3000-6500	11,0	450*396*82	11,7	570*570*300
GTD-05PB90	90	12150	3000-6500	11,0	450*396*82	11,7	570*570*300

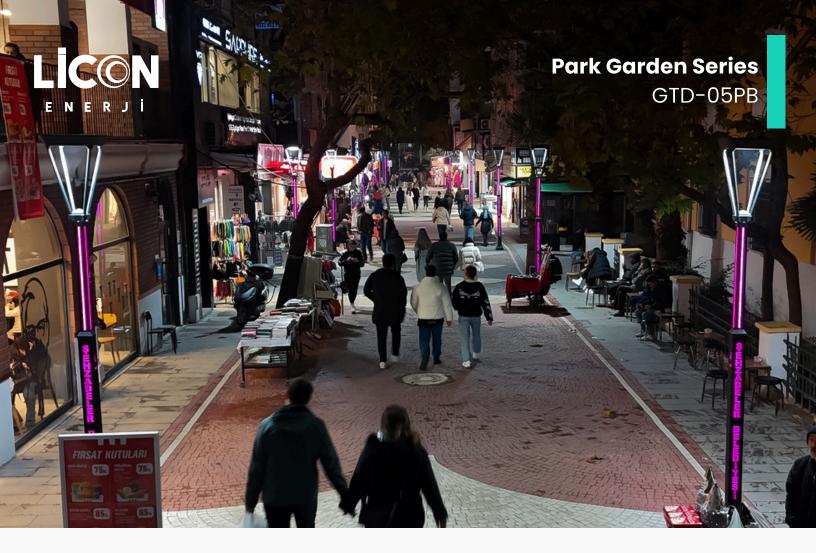

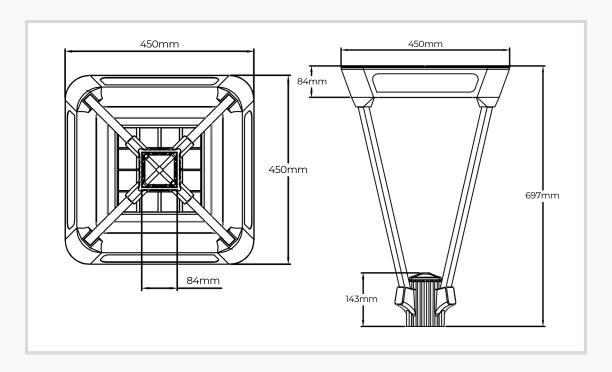







GTD-03P offers a clear and bright environment for any sporting event with its powerful LED technology and wide light emitting capacity

Options

• Emergency Kit: Yes (1-3 hours)

• Dimming Protocol: Available

PROJECTOR SERIES GTD 03P

GTD-03P400

GTD-03P500

GTD-03P600















Technicial Specifications

- Product body; aluminum injection
- Excellent thermal performance
- Lifetime: >50,000 hours, PF: >95%
- 360° adjustable mounting angle
- 30°-60°-120° angle option
- Input Voltage: 220-240V Frequency: 50-60 Hz
- Color rendering ind. (CRI): >70
- Power factor: >0.95
- 3 year warranty.

Areas of Use

Urban Roads Sports Fields **Indoor Sports Hall**


Squares


PRODUCT CODE	POWER (W)	LUMINOUS FLUX (Im)	COLOR TEMPERATURE (k)	PRODUCT WEIGHT (kg)	PRODUCT DIMENSIONS (mm)	GROSS WEIGHT (kg)	BOX DIMENSIONS (mm)
GTD-03P400	400	54000	3000-6500	13,0	390*490*200	14,0	410*510*220
GTD-03P500	500	67500	3000-6500	13,0	390*490*200	14,0	410*510*220
GTD-03P600	600	81000	3000-6500	13,0	390*490*200	14,0	410*510*220





Aluminum Body Impact resistance High heat transfer **Tempered Glass** Provides unmatched protection with its durability and antiscratch surface **Waterproof** IP 66 protection class

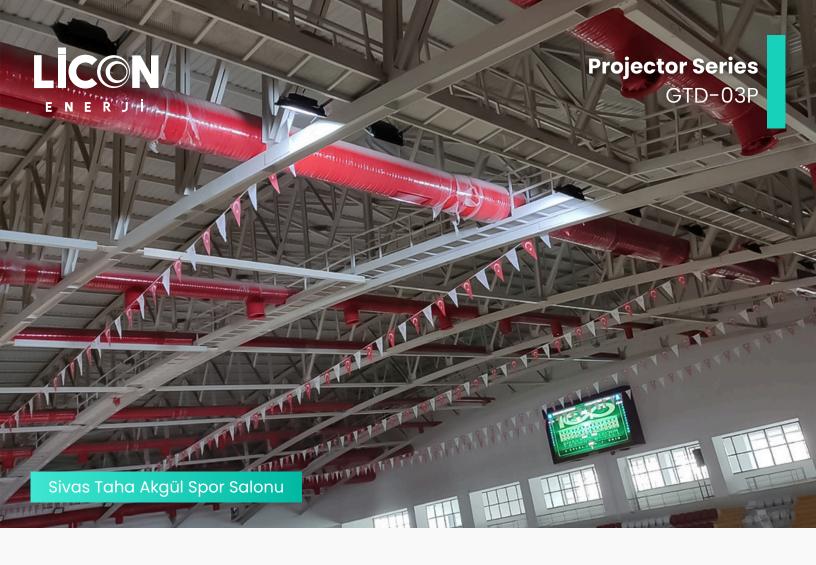

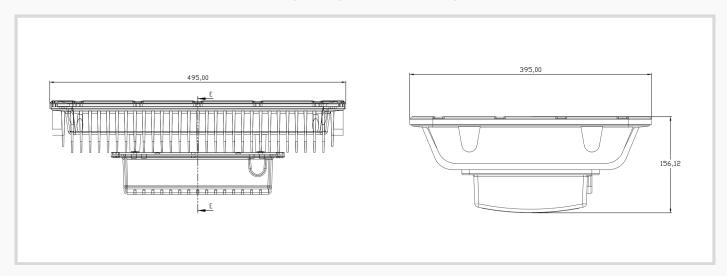

LENS SEÇENEKLERİ

18°	30°	60°	90°	120°





GTD-03PX2 offers a clear and bright environment for any sporting event with its powerful LED technology and wide light emitting capacity

Options

• Emergency Kit: Yes (1-3 hours)

• Dimming Protocol: Available

PROJECTOR SERIES GTD 03PX2

GTD-03PX2 700

GTD-03PX2 800

GTD-03PX2 1000















Technical Specifications


- Product body; aluminum injection
- Excellent thermal performance
- Lifetime: >50,000 hours, PF: >95%
- 360° adjustable mounting angle
- 30°-60°-120° angle option
- Input Voltage: 220-240V Frequency: 50-60 Hz
- Color rendering ind. (CRI): >70
- Power factor: >0.95
- 3 year warranty.

Areas of Use

Urban Roads Sports Fields Indoor Sports Hall Building Environments Squares

PRODUCT CODE	POWER (W)	LUMINOUS FLUX (Im)	COLOR TEMPERATURE (k)	PRODUCT WEIGHT (kg)	PRODUCT SIZES (mm)	GROSS WEIGHT (kg)	BOX SIZES (mm)
GTD-03PX2-700	700	81000	3000-6500	40,0	800*490*200	41	820*510*220
GTD-03PX2-800	800	108000	3000-6500	40,0	800*490*200	41	820*510*220
GTD-03PX2-1000	1000	135000	3000-6500	40,0	800*490*200	41	820*510*220



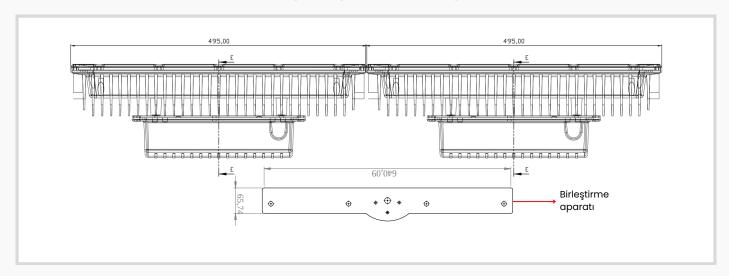

18°	30°	60°	90°	120°





GTD-05P offers a clear and bright environment for any sporting event with its powerful LED technology and wide light emitting capacity

Options

• Emergency Kit: Yes (1-3 hours)

• Dimming Protocol: Available

PROJECTOR SERIES GTD 05P

GTD-05P100

GTD-05P120

GTD-05P150

GTD-05P180

GTD-05P200















Technicial Specifications

- Product body; aluminum injection
- Excellent thermal performance
- Lifetime: >50,000 hours, PF: >95%
- 360° adjustable mounting angle
- 30°-60°-120° angle option
- Input Voltage: 220-240V Frequency: 50-60 Hz
- Color rendering ind. (CRI): >70
- Power factor: >0.95
- 3 year warranty.

Areas of Use

Urban Roads

Sports Fields

Indoor Sports Hall

Squares


PRODUCT CODE	POWER (W)	LUMINOUS FLUX (Im)	COLOR TEMPERATURE (k)	PRODUCT WEIGHT (kg)	PRODUCT SIZES (mm)	GROSS WEIGHT (kg)	BOX SIZES (mm)
GTD-05P-100	100	13500	3000-6500	7,2	330*330*60	7,5	400*400*130
GTD-05P-120	120	16200	3000-6500	7,2	330*330*60	7,5	400*400*130
GTD-05P-150	150	20250	3000-6500	7,2	330*330*60	7,5	400*400*130
GTD-05P-180	180	24300	3000-6500	7,2	330*330*60	7,5	400*400*130
GTD-05P-200	200	27000	3000-6500	7,2	330*330*60	7,5	400*400*130




Projector Series

GTD-05P



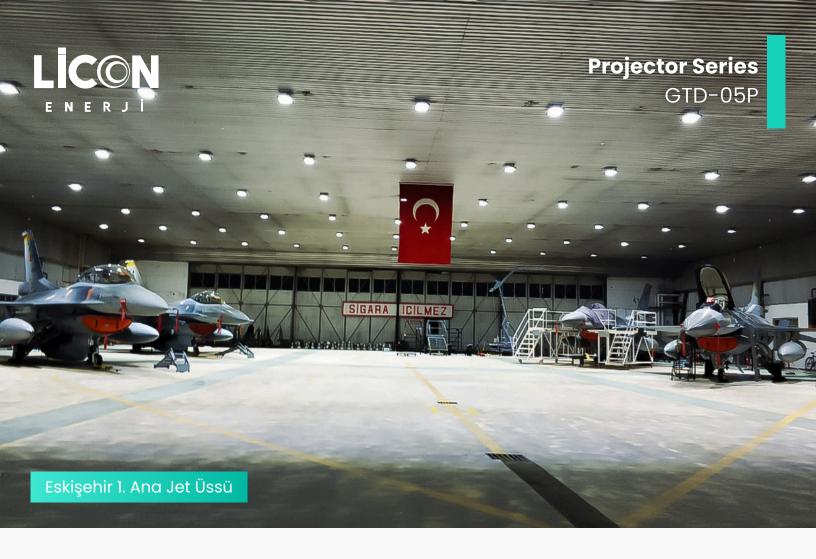

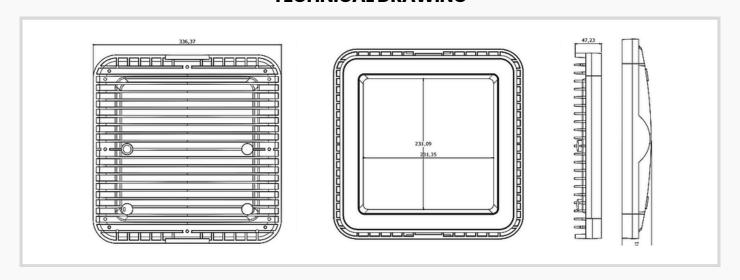

18°	30°	60°	90°	120°	
-----	-----	-----	-----	------	--





GTD-07P offers a clear and bright environment for any sporting event with its powerful LED technology and wide light emitting capacity

Options

• Emergency Kit: Yes (1-3 hours)

• Dimming Protocol: Available

PROJECTOR SERIES GTD 07P

GTD-07P35

GTD-07P50

GTD-07P80

GTD-07P100















Technical Specifications

- Product body; aluminum injection
- Excellent thermal performance
- Lifetime: >50,000 hours, PF: >95%
- 360° adjustable mounting angle
- 30°-60°-120° angle option
- Input Voltage: 220-240V Frequency: 50-60 Hz
- Color rendering ind. (CRI): >70
- Power factor: >0.95
- 3 year warranty.

Areas of Use

Urban Roads Sports Fields **Indoor Sports Hall**

Squares

PRODUCT CODE	POWER (W)	LUMINOUS FLUX (Im)	COLOR TEMPERATURE (k)	PRODUCT WEIGHT (kg)	PRODUCT SIZES (mm)	GROSS WEIGHT (kg)	BOX SIZES (mm)
GTD-07P-35	35	4.725	3000-6500	4,5	250*208*63	5,0	300*300*130
GTD-07P-50	50	6.750	3000-6500	4,5	250*208*63	5,0	300*300*130
GTD-07P-80	80	10.800	3000-6500	4,5	250*208*63	5,0	300*300*130
GTD-07P-100	100	13.500	3000-6500	4,5	250*208*63	5,0	300*300*130





GTD-07P offers a clear and bright environment for any sporting event with its powerful LED technology and wide light emitting capacity

Options

• Emergency Kit: Yes (1-3 hours)

• Dimming Protocol: Available

PROJECTOR SERIES GTD 07P

GTD-07P35

GTD-07P50

GTD-07P59

GTD-07P80

GTD-07P100













Technical Specifications

• Product body; aluminum injection

• Tempered Glass

• Lighting Surge Protector: 4kV

• Excellent thermal performance

• Lifetime: >50,000 hours, PF: >95%

• 360° adjustable mounting angle

• 30°-60°-120° angle option

• Input Voltage: 220-240V Frequency: 50-60 Hz

• Color rendering ind. (CRI): >70

• Power factor: >0.95

• 3 year warranty.

Areas of Use

Urban Roads

Sports Fields

Indoor Sports Hall

Squares

PRODUCT CODE	POWER (W)	LUMINOUS FLUX (Im)	COLOR TEMPERATURE (k)	PRODUCT WEIGHT (kg)	PRODUCT SIZES (mm)	GROSS WEIGHT (kg)	BOX SIZES (mm)
GTD-07P-35	35	4.725	3000-6500	4,5	250*208*63	5,0	300*300*130
GTD-07P-50	50	6.750	3000-6500	4,5	250*208*63	5,0	300*300*130
GTD-07P-59	59	7.965	3000-6500	4,5	250*208*63	5,0	300*300*130
GTD-07P-80	80	10.800	3000-6500	4,5	250*208*63	5,0	300*300*130
GTD-07P-100	100	13.500	3000-6500	4,5	250*208*63	5,0	300*300*130





GTD-07P offers a clear and bright environment for any sporting event with its powerful LED technology and wide light emitting capacity

Options

• Emergency Kit: Yes (1-3 hours)

• Dimming Protocol: Available

PROJECTOR SERIES GTD 07P

GTD-07P35

GTD-07P50

GTD-07P59

GTD-07P80

GTD-07P100















Technical Specifications

- Product body; aluminum injection
- Tempered Glass
- Lighting Surge Protector: 4kV 20kV
- Excellent thermal performance
- Lifetime: >75,000 hours, PF: >95%
- 360° adjustable mounting angle
- 30°-60°-120° angle option
- Input Voltage: 180-240V Frequency: 50-60 Hz
- Color rendering ind. (CRI): >70
- Power factor: >0.95
- 3 year warranty.

Areas of Use

Urban Roads

Sports Fields

Indoor Sports Hall

Squares

PRODUCT CODE	POWER (W)	LUMINOUS FLUX (Im)	COLOR TEMPERATURE (k)	PRODUCT WEIGHT (kg)	PRODUCT SIZES (mm)	GROSS WEIGHT (kg)	BOX SIZES (mm)
GTD-07P-35	35	5250	3000-6500	4,5	250*208*63	5,0	300*300*130
GTD-07P-50	50	7500	3000-6500	4,5	250*208*63	5,0	300*300*130
GTD-07P-59	59	8850	3000-6500	4,5	250*208*63	5,0	300*300*130
GTD-07P-80	80	12000	3000-6500	4,5	250*208*63	5,0	300*300*130
GTD-07P-100	100	15000	3000-6500	4,5	250*208*63	5,0	300*300*130












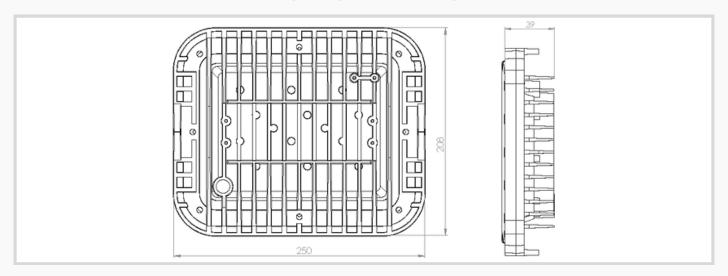

18°	30°	60°	90°	120°



Equipped with powerful and efficient LED technology, the Canopy Lighting Series offers excellent performance in a wide range of applications from gas stations to industrial facilities. Experience safety and brightness together in your workplaces with Licon Energy's innovative solutions. Set the lighting standards of the future with our customized solutions for every environment.





GTD-05KP offers continuous and reliable illumination even in the harshest conditions with its advanced LED technology and durable construction.

Options

- Emergency Kit: Yes (1-3 hours)
- Dimming Protocol: Available

CANOPY SERIES GTD 05KP

GTD-05KP70

GTD-05KP100













Technical Specifications

- Product body; aluminum injection
- Excellent thermal performance
- Lifetime: >50,000 hours, PF: >95%
- Input Voltage: 220-240V Frequency: 50-60 Hz
- Color rendering ind. (CRI): >70
- Power factor: >0.95
- 3 year warranty.

Areas of Use


Construction Sites


Fuel Stations

Industrial Facilities

PRODUCT CODE	POWER (W)	LUMINOUS FLUX (Im)	COLOR TEMPERATURE (k)	PRODUCT WEIGHT (kg)	PRODUCT SIZES (mm)	GROSS WEIGHT (kg)	BOX SIZES (mm)
GTD-05KP-70	70	9450	3000-6500	7,7	330*330*60	8,0	350*350*80
GTD-05KP-100	100	13500	3000-6500	7,7	330*330*60	8,0	350*350*80



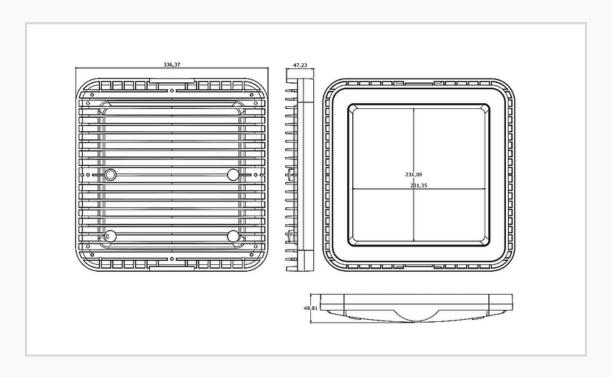

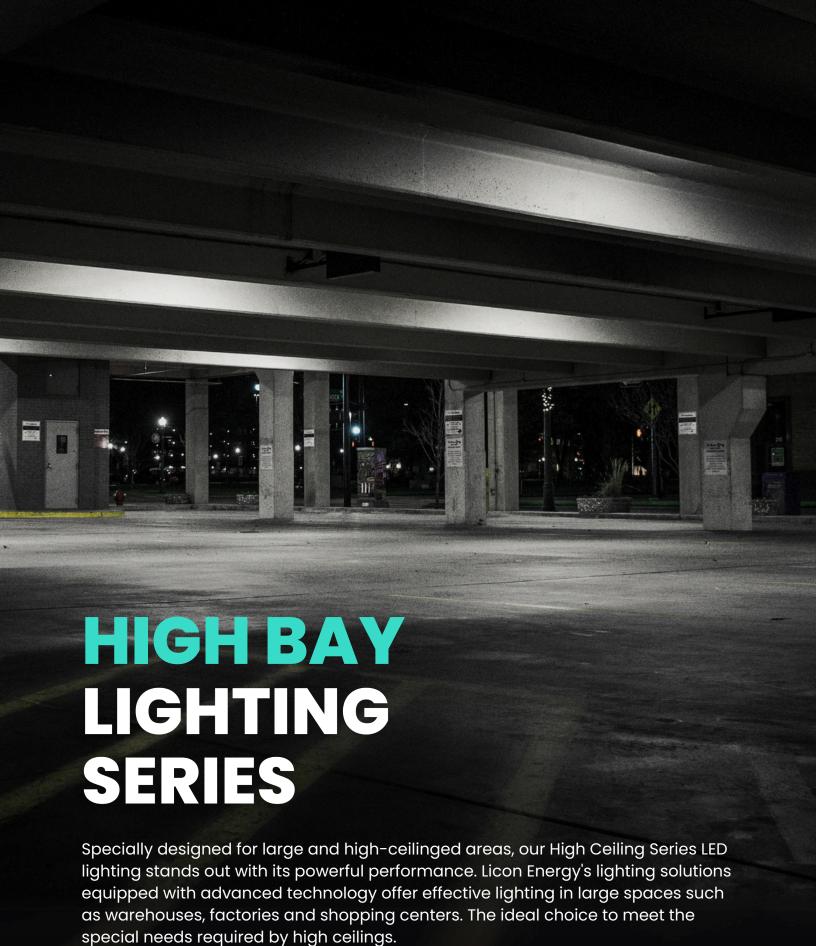





GTI-HB is the ideal lighting solution for industrial areas with high ceilings. It effectively illuminates large areas with its bright and energy-efficient LED lights.

Options

• Emergency Kit: Yes (1-3 hours)

• Dimming Protocol: Available

HIGH BAY LIGHTING SERIES GTI HB (30-60 LENS)

GTI-HB15-30

GTI-HB15-60

GTI-HB15-110

GTI-HB15-160













Technical Specifications

• Product body; aluminum injection

• Excellent thermal performance

• Lifetime: >50,000 hours, PF: >95%

• Input Voltage: 220-240V Frequency: 50-60 Hz

• Color rendering ind. (CRI): >70

• Power factor: >0.95

• 3 year warranty.

Areas of Use

Shopping Centers


Indoor Parking Lots

Industrial Areas

Warehouses

PRODUCT CODE	POWER (W)	LUMINOUS FLUX (Im)	COLOR TEMPERATURE (k)	PRODUCT WEIGHT (kg)	PRODUCT SIZES (mm)	GROSS WEIGHT (kg)	BOX SIZES (mm)
GTI-HB15-30	15	2025	3000-6500	0,531	305*70x56	0,55	550*120*65
GTI-HB15-60	30	4050	3000-6500	1,06	590x70x56	1,22	750*120*65
GTI-HB15-110	60	8100	3000-6500	2,125	1120x70x56	2,2	1350*120*65
GTI-HB15-160	90	12150	3000-6500	2,800	1620x210x48	3	1750*250*65



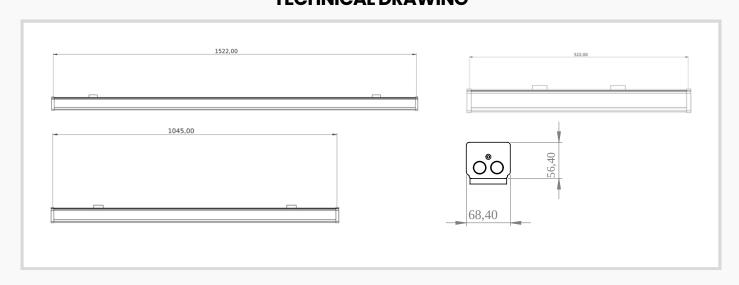

LENS OPTIONS

30° 60°





HIGH BAY LIGHTING SERIES GTI ETX2

GTI-ET50X2

GTI-ET60X2













Product Overview

GTI-ETX2 is the ideal lighting solution for industrial areas with high ceilings. It effectively illuminates large areas with its bright and energy-efficient LED lights.

Options

• Emergency Kit: Yes (1-3 hours)

• Dimming Protocol: Available

Technical Specifications

• Product body; aluminum injection

• Excellent thermal performance

• Lifetime: >50,000 hours, PF: >95%

• Input Voltage: 220-240V Frequency: 50-60 Hz

• Color rendering ind. (CRI): >70

• Power factor: >0.95


• 3 year warranty.

Areas of Use

Shopping Centers	Meeting Rooms	Markets		
Industrial Areas	Hospitals	Corridors		

PRODUCT CODE	POWER (W)	LUMINOUS FLUX (Im)	COLOR TEMPERATURE (k)	PRODUCT WEIGHT (kg)	PRODUCT SIZES (mm)	GROSS WEIGHT (kg)	BOX SIZES (mm)
GTI-ET50X2	100	13500	3000-6500	3,8	1210*210*48	4,3	1260*250*65
GTI-ET60X2	120	16200	3000-6500	4,6	1600*210*48	5,2	1260*250*65



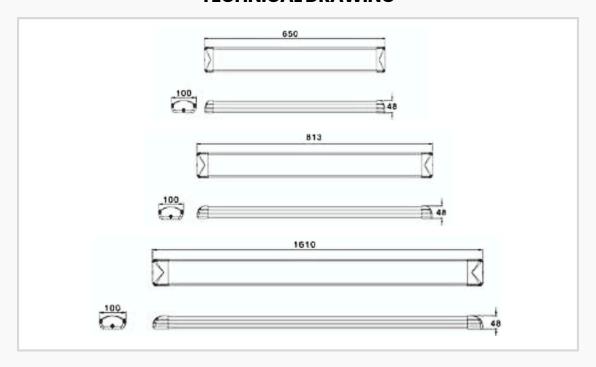





GTD-05E D is an ideal lighting solution for industrial areas with high ceilings. It effectively illuminates large areas with its bright and energy-efficient LED lights.

Options

• Emergency Kit: Yes (1-3 hours)

• Dimming Protocol: Available

HIGH BAY LIGHTING SERIES GTD 05ED

GTD-05ED100

GTD-05ED125

GTD-05ED150

GTD-05ED180















Technical Specifications

• Product body; aluminum injection

• Excellent thermal performance

• Lifetime: >50,000 hours, PF: >95%

• Input Voltage: 220-240V Frequency: 50-60 Hz

• Color rendering ind. (CRI): >70

• Power factor: >0.95


• 3 year warranty.

Areas of Use

Indoor Sports Halls **Closed Warehouses Industrial Facilities Construction Sites**

PRODUCT CODE	POWER (W)	LUMINOUS FLUX (Im)	COLOR TEMPERATURE (k)	PRODUCT WEIGHT (kg)	PRODUCT SIZES (mm)	GROSS WEIGHT (kg)	BOX SIZES (mm)
GTD-ED05-100	100	13500	3000-6500	7,2	330*330*60	7,9	400*400*130
GTD-ED05-125	125	16875	3000-6500	7,2	330*330*60	7,9	400*400*130
GTD-ED05-150	150	20250	3000-6500	7,2	330*330*60	7,9	400*400*130
GTD-ED05-180	180	24300	3000-6500	7,2	330*330*60	7,9	400*400*130
GTD-ED05-200	200	27000	3000-6500	7,2	330*330*60	7,9	400*400*130



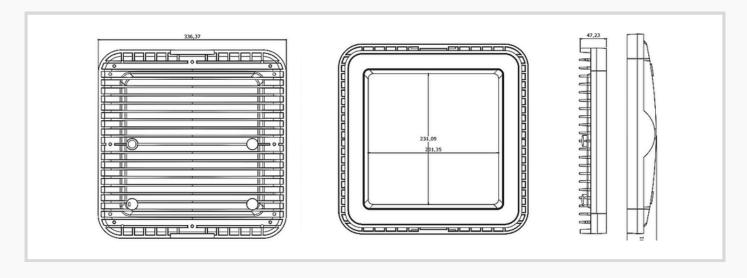

LENS OPTIONS

18° 30° 60° 90° 120°







GTI-AT combines aesthetics and functionality in suspended ceiling lighting. It adds elegance to your spaces with its elegant design and effective light distribution.

Options

• Emergency Kit: Yes (1-3 hours)

• Dimming Protocol: Available

SUSPENDED CEILING LIGHTING SERIES GTI AT

GTI-AT9S

GTI-AT18S

GTI-AT36S

GTI-AT36S1

GTI-AT50S













Technical Specifications

• Product body; DKP sheet metal body

• Excellent thermal performance

• Lifetime: >50,000 hours, PF: >95%

• Input Voltage: 220-240V Frequency: 50-60 Hz

• Color rendering ind. (CRI): >70

• Power factor: >0.95


• 3 year warranty.


Areas of Use

Shopping Centers	Markets	Hotels
Meeting Rooms	Corridors	

PRODUCT CODE	POWER (W)	LUMINOUS FLUX (Im)	COLOR TEMPERATURE (k)	PRODUCT WEIGHT (kg)	ÜRÜN EBATLARI (mm)	PRODUCT SIZES (mm)	BOX SIZES (mm)
GTI-AT9S	9	1215	3000-6500	2,9	294x294x55	1,7	315*315*70
GTI-AT18S	18	2430	3000-6500	2,9	594x594x55	2,6	615*315*70
GTI-AT36S	36	4860	3000-6500	2,9	594x594x55	3,0	615*615*70
GTI-AT36SI	36	4860	3000-6500	2,9	1194x294x55	3,0	1220*315*70
GTD-AT50S	50	6750	3000-6500	2,9	594x594x55	3,0	615*615*70



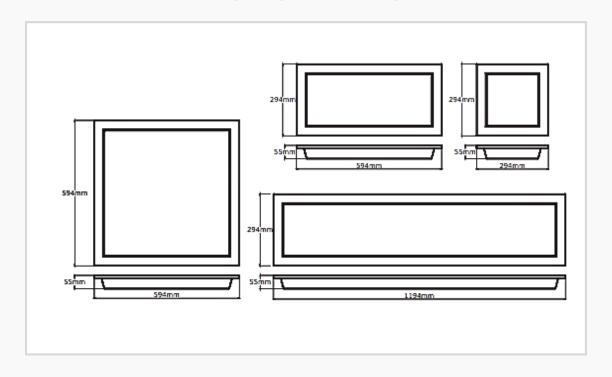

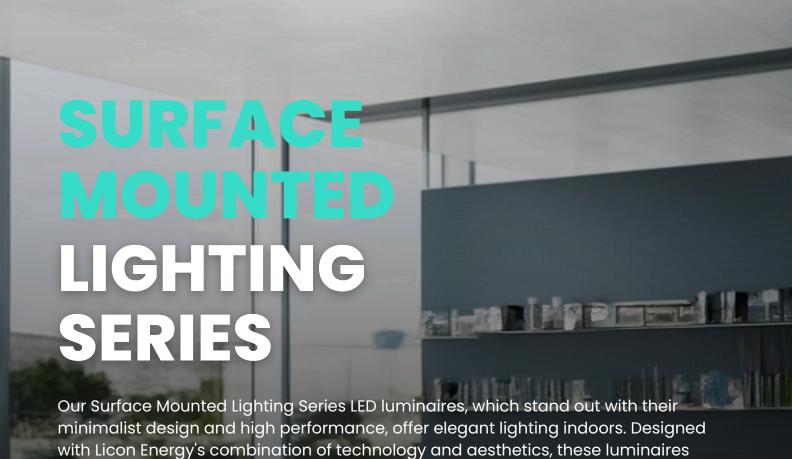

provide a modern look and effective lighting in every space from homes to offices.

The perfect combination of style and function.





GTI-SU, sıva üstü aydınlatmasında estetik ve fonksiyonelliği bir araya getirir. Zarif tasarımı ve etkili ışık dağılımı ile mekanlarınıza şıklık katar.

Options

• Emergency Kit: Yes (1-3 hours)

• Dimming Protocol: Available

SURFACE MOUNDTED LIGHTING SERIES GTI SU

 GTI-SU9S
 GTI-SU18S
 GTI-SU36S

 GTI-SU36S1
 GTI-SU50S
 CTI-SU50S













Technical Specifications

• Product body; DKP sheet metal body

• Excellent thermal performance

• Lifetime: >50,000 hours, PF: >95%

• Input Voltage: 220-240V Frequency: 50-60 Hz

• Color rendering ind. (CRI): >70

• Power factor: >0.95


• 3 year warranty.

Areas of Use

Shopping Centers	Markets	Hotels
Meeting Rooms	Corridors	

PRODUCT CODE	POWER (W)	LUMINOUS FLUX (Im)	COLOR TEMPERATURE (k)	PRODUCT WEIGHT (kg)	PRODUCT SIZES (mm)	GROSS WEIGHT (kg)	BOX SIZES (mm)
GTI-SU9S	9	1215	3000-6500	1,3	294x294x55	1,5	315*315*70
GTI-SU18S	18	2430	3000-6500	2,7	594x594x55	3,2	615*315*70
GTI-SU36S	36	4860	3000-6500	4,2	594x594x55	4,6	615*615*70
GTI-SU36S1	36	4860	3000-6500	4,2	1194x294x55	4,6	1220*315*70
GTD-SU50S	50	6750	3000-6500	4,2	594x594x55	4,6	615*615*70



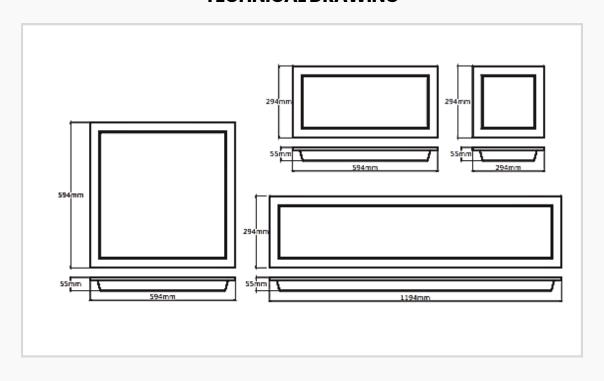







GTI-AP combines aesthetics and functionality in drywall suspended ceiling lighting. It adds elegance to your spaces with its elegant design and effective light distribution.

Options

• Emergency Kit: Yes (1-3 hours)

• Dimming Protocol: Available

DRYWALL LIGHTING SERIES GTI AP

GTI-AP9S

GTI-AP18S

GTI-AP36S

GTI-AP36S1

GTI-AP50S













Technical Specifications

• Product body; DKP sheet metal body

• Excellent thermal performance

• Lifetime: >50,000 hours, PF: >95%

• Input Voltage: 220-240V Frequency: 50-60 Hz

• Color rendering ind. (CRI): >70

• Power factor: >0.95


• 3 year warranty.

Areas of Use

Shopping Centers	Markets	Hotels
Meeting Rooms	Corridors	

PRODUCT CODE	POWER (W)	LUMINOUS FLUX (Im)	COLOR TEMPERATURE (k)	PRODUCT WEIGHT (kg)	PRODUCT SIZES (mm)	GROSS WEIGHT (kg)	BOX SIZES (mm)
GTI-AP9S	9	1215	3000-6500	1,3	294*294*55	1,7	315*315*70
GTI-AP18S	18	2430	3000-6500	2,2	594*594*55	2,6	615*315*70
GTI-AP36S	36	4860	3000-6500	2,9	594*594*55	3,0	615*615*70
GTI-AP36S1	36	4860	3000-6500	2,9	1194*294*55	3,0	1220*315*70
GTD-AP50S	50	6750	3000-6500	2,9	594*594*55	3,0	615*615*70



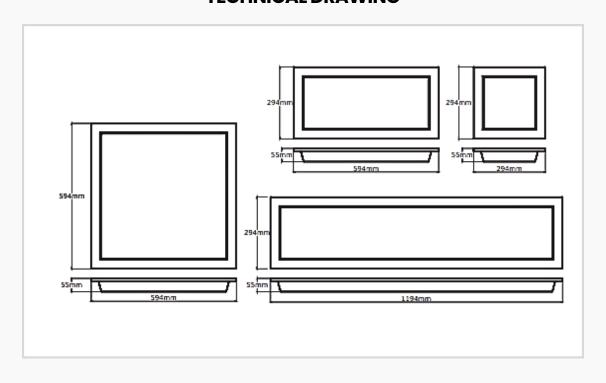



such as shops, restaurants and hotels. Add a unique atmosphere to your spaces

while illuminating every detail.





GTI-CP, metal asma tavan aydınlatmasında estetik ve fonksiyonelliği bir araya getirir. Zarif tasarımı ve etkili ışık dağılımı ile mekanlarınıza şıklık katar.

Options

• Emergency Kit: Yes (1-3 hours)

• Dimming Protocol: Available

CLIPIN LIGHTING SERIES **GTI CP**

GTI-CP36S GTI-CP9S GTI-CP18S GTI-CP36S1 GTI-CP50S













Technical Specifications

• Product body; DKP sheet metal body

• Excellent thermal performance

• Lifetime: >50,000 hours, PF: >95%

• Input Voltage: 220-240V Frequency: 50-60 Hz

• Color rendering ind. (CRI): >70

• Power factor: >0.95


• 3 year warranty.

Areas of Use

Shopping Centers	Markets	Hotels
Meeting Rooms	Corridors	

PRODUCT CODE	POWER (W)	LUMINOUS FLUX (Im)	COLOR TEMPERATURE (k)	PRODUCT WEIGHT (kg)	PRODUCT SIZES (mm)	GROSS WEIGHT (kg)	BOX SIZES (mm)
GTI-CP9S	9	1215	3000-6500	1,4	300*300*55	1,8	331*315*70
GTI-CP18S	18	2430	3000-6500	2,3	600*300*55	2,7	615*315*70
GTI-CP36S	36	4860	3000-6500	3,0	600*300*55	3,4	615*615*70
GTI-CP36S1	36	4860	3000-6500	3,0	1200*300*55	3,4	1215*315*70
GTD-CP50S	50	6750	3000-6500	3,0	600*600*55	3,4	615*615*70



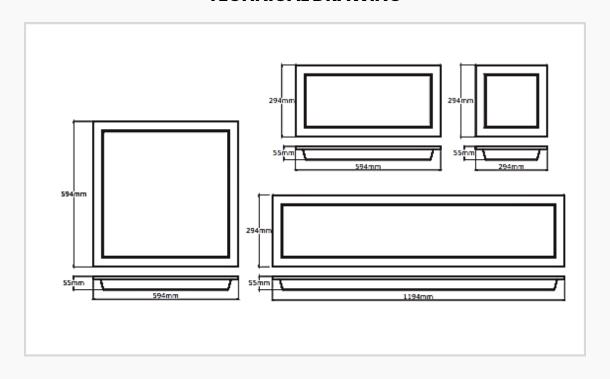







GTI-ET18-40

GTI-ET36-80

GTI-ET50-120

GTI-ET50-150











Product Overview

It is an effective linear lighting solution for many areas. It provides excellent lighting in any environment with its bright and even light distribution. Reduces your costs with its long life and energy efficient structure

Options

• Emergency Kit: Yes (1-3 hours)

• Dimming Protocol: Available

Technical Specifications

• Product body; aluminum

• Lightweight compact design

• Lifetime: >50,000 hours, PF: >95%

• Input Voltage: 220-240V Frequency: 50-60 Hz

· With built-in emergency kit option


Power factor: >0.953 year warranty.

Areas of Use

Shopping Centers	Markets	Hotels
Meeting Rooms	Corridors	Hospitals

PRODUCT CODE	POWER (W)	LUMINOUS FLUX (Im)	COLOR TEMPERATURE (k)	PRODUCT WEIGHT (kg)	PRODUCT DIMENSIONS (mm)	GROSS WEIGHT (kg)	BOX DIMENSIONS (mm)
GTI-ET18-40	18	2430	3000-6500	0,75	650*100*48	1,2	450*105*52
GTI-ET36-80	35	4725	3000-6500	1,3	813*100*48	1,6	850*105*52
GTI-ET50-120	50	6750	3000-6500	1,9	1210*100*48	2,2	1250*105*52
GTI-ET60-160	60	8100	3000-6500	2,5	1610*100*48	2,7	1650*105*52



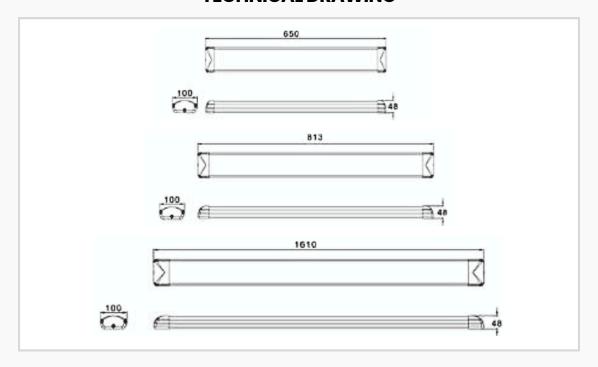





GTI-ET01-18-50

GTI-ET01-18-100

GTI-ET01-18-150













Product Overview

It is an effective linear lighting solution for many areas. It provides excellent lighting in any environment with its bright and even light distribution. Reduces your costs with its long life and energy efficient structure.

Options

• Emergency Kit: Yes (1-3 hours)

• Dimming Protocol: Available

Technical Specifications

• Product body; plastic body

• Lightweight compact design

• Lifetime: >50,000 hours, PF: >95%

• Input Voltage: 220-240V Frequency: 50-60 Hz


· With built-in emergency kit option


Power factor: >0.953 year warranty.

Usage Areas

Shopping Centers	Markets	Hotels
Meeting Rooms	Corridors	Hospitals

PRODUCT CODE	POWER (W)	LUMINOUS FLUX (Im)	COLOR TEMPERATURE (k)	PRODUCT WEIGHT (kg)	PRODUCT DIMENSIONS (mm)	GROSS WEIGHT (kg)	BOX DIMENSIONS (mm)
GTI-ET01-18-50	18	2430	3000-6500	0,75	500*60*51	1,05	550*70*55
GTI-ET01-35-100	35	4725	3000-6500	1,3	1000*60*51	1,6	1050*70*55
GTI-ET01-50-150	50	6750	3000-6500	2,2	1500*60*51	2,5	1550*70*55

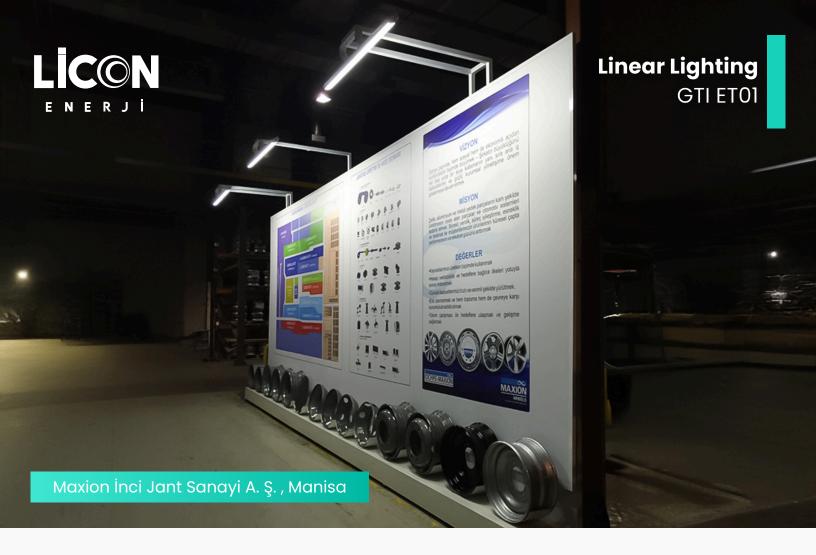

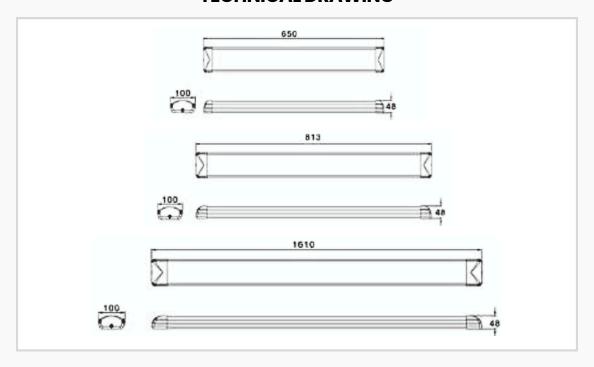





GTI-LN9-60 GTI-LN18-60













Product Overview

It is an effective linear lighting solution for many areas. It provides excellent lighting in any environment with its bright and even light distribution. Reduces your costs with its long life and energy efficient structure.

Options

• Emergency Kit: Yes (1-3 hours)

• Dimming Protocol: Available

Technical Specifications

• Product body; Aluminum Injection

· Lightweight compact design

• Lifetime: >50,000 hours, PF: >95%

• Input Voltage: 220-240V Frequency: 50-60 Hz


· With built-in emergency kit option


• Power factor: >0.95 • 3 year warranty.

Usage Areas

Shopping Centers	Markets	Hotels
Meeting Rooms	Corridors	Hospitals

PRODUCT CODE	POWER (W)	LUMINOUS FLUX (Im)	COLOR TEMPERATURE (k)	PRODUCT WEIGHT (kg)	PRODUCT DIMENSIONS (mm)	GROSS WEIGHT (kg)	BOX DIMENSIONS (mm)
GTI-LN9-60	9	1215	3000-6500	0,5	813*25*35	0,7	830*30*40
GTI-LN18-60	18	2430	3000-6500	0,9	1210*25*35	1,2	1230*30*40

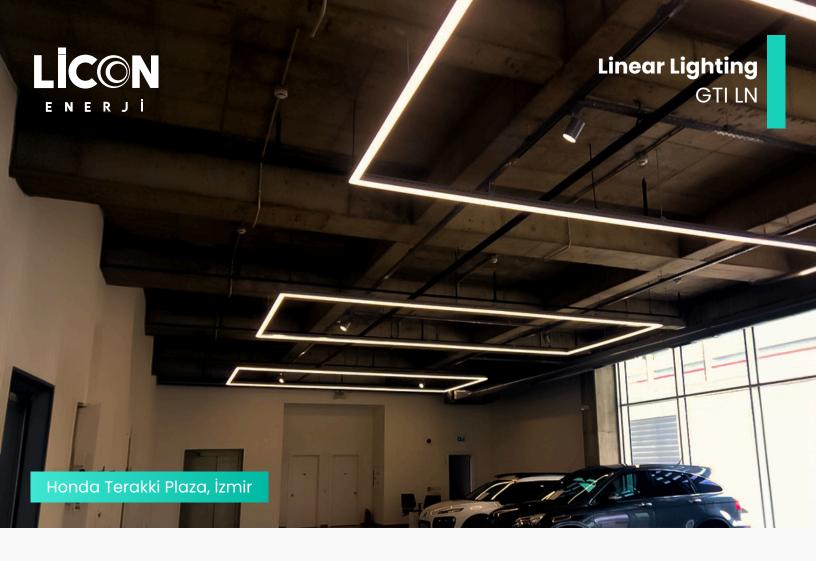

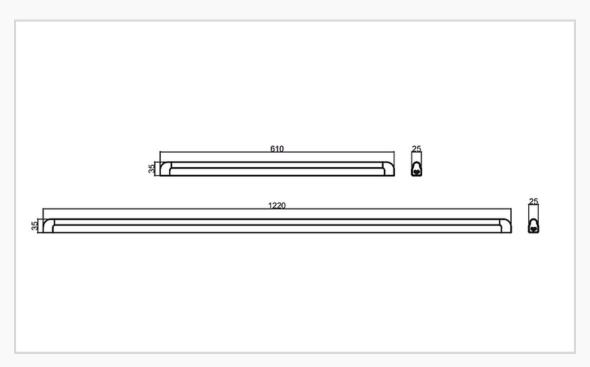





It is an effective linear lighting solution for many areas. It provides excellent lighting in any environment with its bright and even light distribution. Reduces your costs with its long life and energy efficient structure.

Options

• Emergency Kit: Yes (1-3 hours)

• Dimming Protocol: Available

LINEAR LIGHTING GTI LNS

GTI-LN-S18 50

GTI-LN-S36 120

GTI-LN-S36 150













Technical Specifications

• Product body; aluminum injection

• Excellent thermal performance

• Lifetime: >50,000 hours, PF: >95%

• Input Voltage: 220-240V Frequency: 50-60 Hz

• Color rendering ind. (CRI): >70


Power factor: >0.95


• 3 year warranty.

Usage Areas

Shopping Centers	Markets	Hotels
Meeting Rooms	Corridors	Hospitals

PRODUCT CODE	POWER (W)	LUMINOUS FLUX (Im)	COLOR TEMPERATURE (k)	PRODUC T WEIGHT (kg)	PRODUCT DIMENSIONS (mm)	GROSS WEIGHT (kg)	BOX DIMENSIONS (mm)
GTI-LN-S18-50	18	2430	3000-6500	0,5	510*62*50	0,7	550*65*55
GTI-LN-S36-120	35	4725	3000-6500	1,3	1210*62*50	1,2	1250*65*55
GTI-LN-S52-150	50	6750	3000-6500	1,5	1510*62*50	1,7	1550*65*55

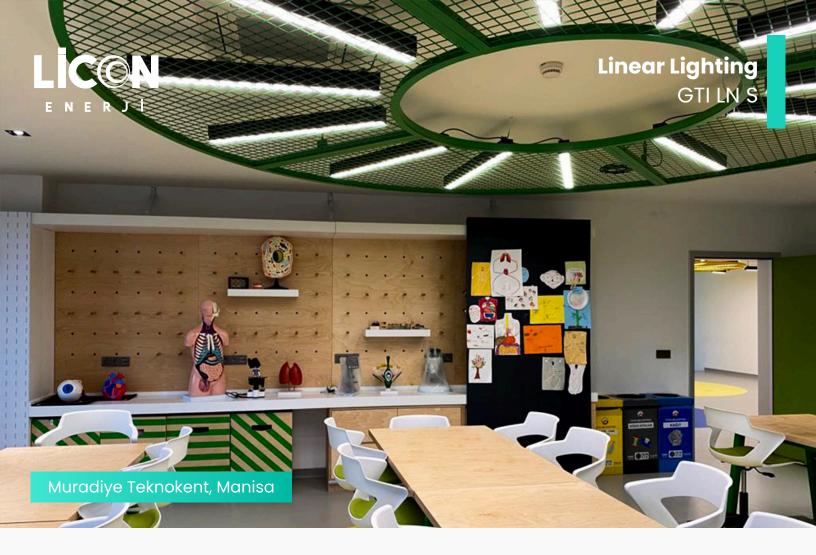

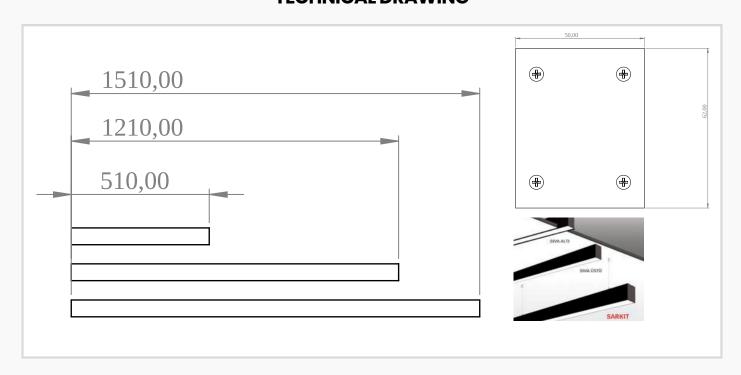





GTI-CLK15

GTI-CLK30

GTI-CLK45













Product Overview

It is an effective linear lighting solution for many areas. It provides excellent lighting in any environment with its bright and even light distribution. Reduces your costs with its long life and energy efficient structure.

Options

• Emergency Kit: Yes (1-3 hours)

• Dimming Protocol: Available

Technical Specifications

• Product body; aluminum injection

• Excellent thermal performance

• Lifetime: >50,000 hours, PF: >95%

• Input Voltage: 220-240V Frequency: 50-60 Hz

Color rendering ind. (CRI): >70


Power factor: >0.95


• 3 year warranty.

Usage Areas


Shopping Centers	Markets	Hotels
Meeting Rooms	Corridors	Hospitals

PRODUCT CODE	POWER (W)	LUMINOUS FLUX (Im)	COLOR TEMPERATURE (k)	PRODUCT WEIGHT (kg)	PRODUCT DIMENSIONS (mm)	GROSS WEIGHT (kg)	BOX DIMENSIONS (mm)
GTI-CLK15	15	2025	3000-6500	0,6	522*70*56	0,8	550*90*70
GTI-CLK30	30	4050	3000-6500	1,55	1045*70*56	1,9	1090*90*70
GTI-CLK45	45	6075	3000-6500	1,9	1522*700*56	2,2	1560*90*70

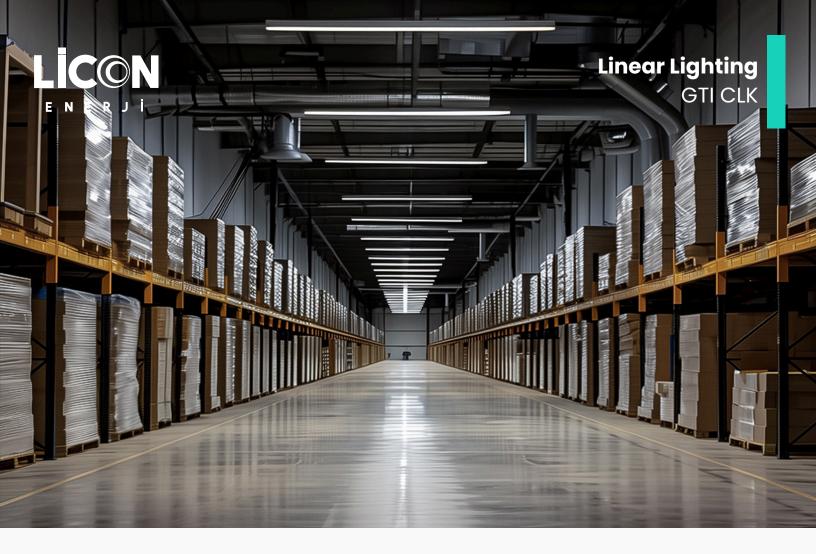

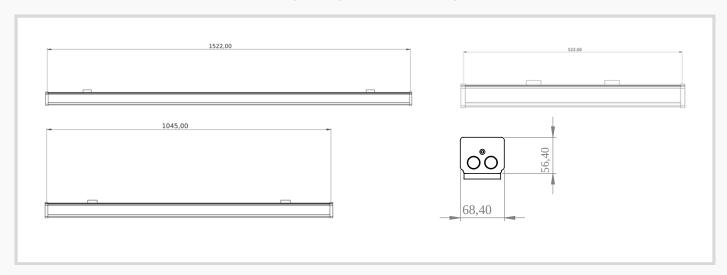

LENS OPTIONS









DMX LINEAR LIGHTING SERIES **GTI DMX**

GTI-DMX (E F 67 67













Product Overview

DMX Linear is a led luminaire used for illuminating and changing the color of the interior and exterior facades of buildings, bridges, skyscrapers, museums, and historical buildings. Produced with different power and lens options according to the application area, DMX Linear can be easily applied to all kinds of facades and surfaces with special mounting and foot systems. It has a single row led array and is produced in desired length. DMX Linear is produced in two different types: controllable and fixed color. Non-controllable fixed color luminaires operate with an internal power unit with 24 VAC input without the need for an external panel. In cases where a luminaire panel is used, power and control units can be placed inside the panel. DMX Linear, which has a plastic body, is designed to work for a long time in unfavorable outdoor conditions and has IP67 dust and water protection class.

Technical Specifications

- Desired size option
- Power options from 9W to 144W
- · Cool white, Daylight, Warm white, Red, Green, Blue, Amber, Mint, Cyan, Lime, Deep red and Royal blue fixed color Led options
- RGB/RGBW/RGBA option with DMX control
- Easy installation with built-in DMX decoder and power unit
- Single cable power and data input
- Stainless steel assembly equipment
- Compliance with IP67 protection class
- Optional body color





35,75

COLOR OPTIONS





EMERGENCY LIGHTING SERIES

The Emergency Lighting Series, which prioritizes your safety, consists of LED luminaires that are instantly activated and provide high performance. Licon Energy's technology and safety-oriented solutions illuminate safe exit routes and areas in emergencies. Be ready at any moment with its energy-saving and durable structure.





EMERGENCY LIGHTING SERIES GTI ACL

GTI-ACL-2













Areas of Use

Shopping Centers

Meeting Rooms

Fuel Stations

Industrial Facilities

Construction Sites

Markets

Corridors

Hotels

Product Features

- · Single-sided or double-sided mounting options
- Possibility of mounting to suspended ceiling with built-in cover, to surface-mounted ceiling with steel wire suspension chain or to wall with articulated bracket
- ABS V0 fireproof plastic housing
- Double-sided, screen-printed or pantograph engraved, side-lit pendant plexiglass direction board
- Industrial high temperature Ni-Cd battery with cable and polarized connector
- Overcharge and discharge protection for Ni-Cd battery
- Test button, green LED mains and charging indicator
- Class A energy consumption
- Complies with TS 8710 / EN 60598-2-22 and CE norms.

Technical Specifications

• Operating voltage(V): 220-230V AC 50-60Hz

• Power (W): LED 2W

• Operating temperature: -50C... +500C

Protection class: IP54Insulation class: Class IICharging time: 24 hours



TECHNICAL DRAWING

Tavana gömme montaj aparatı


PISTOGRAMS







ALL IN ONE SOLAR LIGHTING

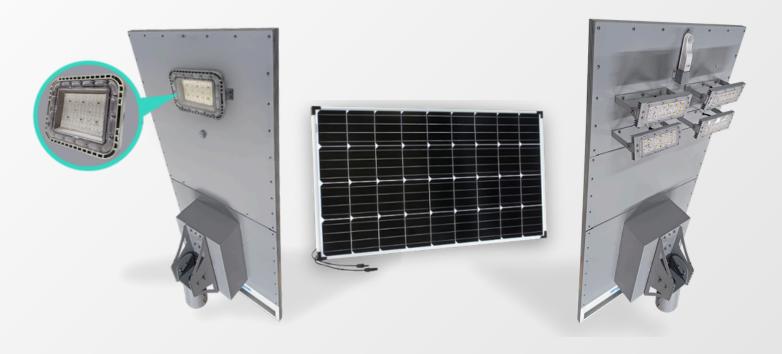















Areas of Use

City Roads

Building Environments

Parks

Squares

Public Parking Lots

Technical Specifications

- Dimmable solar control board
- Monocrystalline Solar Panel
- IP66 protection against dust and moisture
- · High-strength aluminum housing
- More efficient charging with MPPT Charging unit
- Motion Sensor

- LiFePO4 Battery
- High storage capacity























Areas of Use

City Roads

Building Environments

Parks

Squares

Public Parking Lots


Technical Specifications

- Dimmable solar control board
- Monocrystalline Solar Panel
- IP66 protection against dust and moisture
- High-strength aluminum housing
- More efficient charging with MPPT Charging unit
- Motion Sensor

- LiFePO4 Battery
- High storage capacity

PRODUCT NAME	POWER (W)	LUMINOUS FLUX	COLOUR TEMP.	BATTERY CAPACITY	SOLAR PANEL POWER	PRODUCT SIZES (mm)	BOX SIZES (mm)
AIO60	60	10200lm	6500K	5400Wh	120	791*679*30	841*729*80
AIO80	80	13600lm	6500K	7200Wh	140	1148*679*30	1198*729*80
AIO100	100	17000lm	6500K	9000Wh	170	1505*679*30	1555*729*80
AIO120	120	20400lm	6500K	10800Wh	205	1505*679*30	1555*729*80



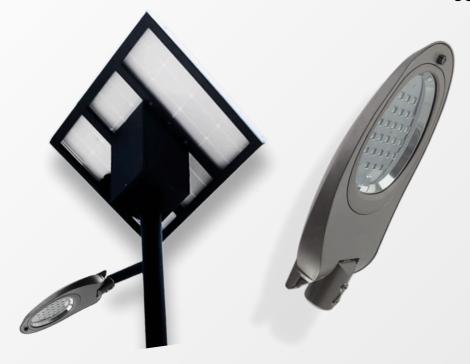















Areas of Use

City Roads

Building Environments

Parks

Squares

Public Parking Lots

Technical Specifications

- Dimmable solar control board
- Monocrystalline Solar Panel
- IP66 protection against dust and moisture
- High-strength aluminum housing
- More efficient charging with MPPT Charging unit
- Motion Sensor

- LiFePO4 Battery
- High storage capacity

PRODUCT NAME	POWER (W)	LUMINOUS FLUX	COLOUR TEMP.	BATTERY CAPACITY	SOLAR PANEL POWER
150S-100	100	13500lm	6500K	1800Wh	350
150S-125	125	168750lm	6500K	2250Wh	460
150S-150	150	20250lm	6500K	2700Wh	560

























Areas of Use

City Roads

Building Environments

Parks

Squares

Public Parking Lots

Technical Specifications

- Dimmable solar control board
- Monocrystalline Solar Panel
- IP66 protection against dust and moisture
- High-strength aluminum housing
- More efficient charging with MPPT Charging unit
- Motion Sensor

- LiFePO4 Battery
- High storage capacity

PRODUCT NAME	POWER (W)	LUMINOUS FLUX	COLOUR TEMP.	BATTERY CAPACITY	SOLAR PANEL POWER
30S-40	40	5400lm	6500K	720Wh	140
30S-60	60	8100lm	6500K	1080Wh	210
30S-80	80	10800lm	6500K	1440Wh	300



36 CELL PERC MONOCRYSTAL DATASHEET

LEXRO

FOR A LIVEABLE WORLD



POSITIVE TOLERANCE

Guaranteed 0- +5W post ve power output tolerance ensures h gh rel ab l ty



SELF CLEANING

Ant -reflect ve, hydrophob c coat ng mproves I ght absorpt on and reduces surface dust




STRONG AIR RESISTANCE

Ent re module cert f ed to w thstand h gh w nd loads (2400 Pascal) and snow loads (5400 Pascal)*



HIGH PERFORMANCE

Excellent performance under low I ght env ronments (morn ngs, even ngs and cloudy days)

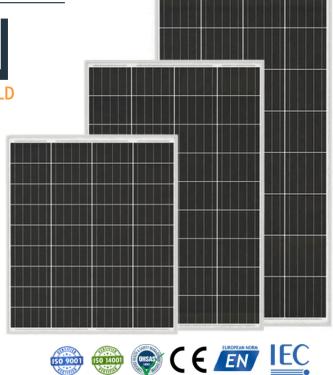













PEAK POWER	OPEN CIRCUIT VOLTAGE Voc (V)	SHORT CIRCUIT CURRENT Isc (A)	PEAK POWER Vmp (V)	PEAK CURRENT IMP (A)	SIZE (mm)	CELL NUMBER (pcs)	NET WEIGHT (kg)
12W	24,84	0,51	20,70	0,58	255 x 355 x 20	36	1
25W	24,84	1,27	20,70	1,21	362 x 433 x 20	36	1,68
50W	24,84	2,55	20,70	2,42	679 x 433 x 20	36	3,8
75W	24,84	3,80	20,70	3,62	679 x 433 x 20	36	5,2
100W	24,84	5,10	20,70	4,83	791 x 679 x 25	36	7
100W-HC	23,04	5,49	19,20	5,21	730 x 716 x 25	32	6,0
125W-HC	24,48	20,40	6,46	6,16	801 x 776 x 25	32	6,5
150W	24,84	7,64	20,70	7,25	1148 x 679 x 25	36	9,5
160W-HC	27,00	7,50	22,50	7,11	978 x 780 x 25	40	7,5
210W	24,96	10,65	20,80	10,10	1505 x 679 x 30	36	11,9

SYSTEM CERTIFICATES

IEC61215/IEC61730/IEC61701/IEC62716 ISO 9001: Qual ty Management System ISO 14001: Env ronmental Management ISO45001: Occupat onal Health and Safety

LEXRON

WARRANTY


12 year Product Workmansh p Warranty

25 year Power Warranty

2% f rst year degradat on

0.45% Annual Power Attenuat on

Industry-lead ng warranty



The spec f cat on and key features descr bed in this The spec f cat on and key features descr bed in this datasheet may deviate is glithly and are not guaranteed. Due to ongoing innovation, R&D enhancement, Lexon Brand reserves their ght to make any adjustment to the information described here in at any time without notice. Please always obtain the most recentivers on of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein. ACS ENERJI

ITOB OSB Mah. Ekrem Dem rtas Cad. No: 44 Menderes - IZMIR 0232 799 00 98

www.acsenerj.com

Enerji Depolama

LiFePO4 BATARYA





12.8V 100Ah

Güçlü performansı ve uzun ömürlü tasarımıyla dikkat çeker. Güvenilir ve dayanıklı yapısıyla elektrikli araçlar, güneş enerjisi depolama sistemleri ve diğer enerji ihtiyaçlarınız için idealdir.

Bataryalarımızı çevrimiçi mağazamızdan satın alın www.ontecshop.com





Suya Karşı Dayanıklı



Enerji Depolama Kaynağı

















SOLAR AND WIRELESS

TRAFFIC LIGHTS




This system is a complete signaling solution that is completely wireless and powered by solar energy.


- Effective signaling in a short time without the need to build infrastructure
- All systems have solar panels and RF communication
- The main unit works as an intersection controller and executes signaling programs
- Fast and secure communication with ISM band
- Frequency hopping algorithm

Technical Specifications

- Compliance with International Standards
- Low Energy Consumption
- Long Life, Low Maintenance Cost
- Homogeneous Light Distribution, High Contrast

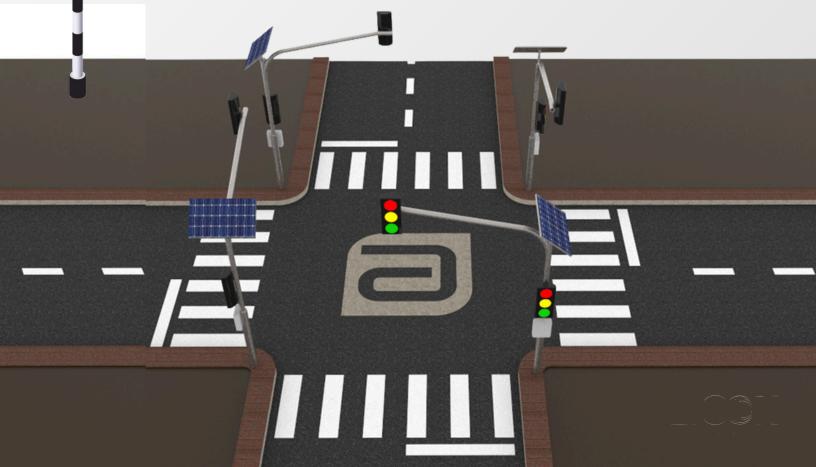

SOLAR AND WIRELESS TRAFFIC LIGHTS SCHEME

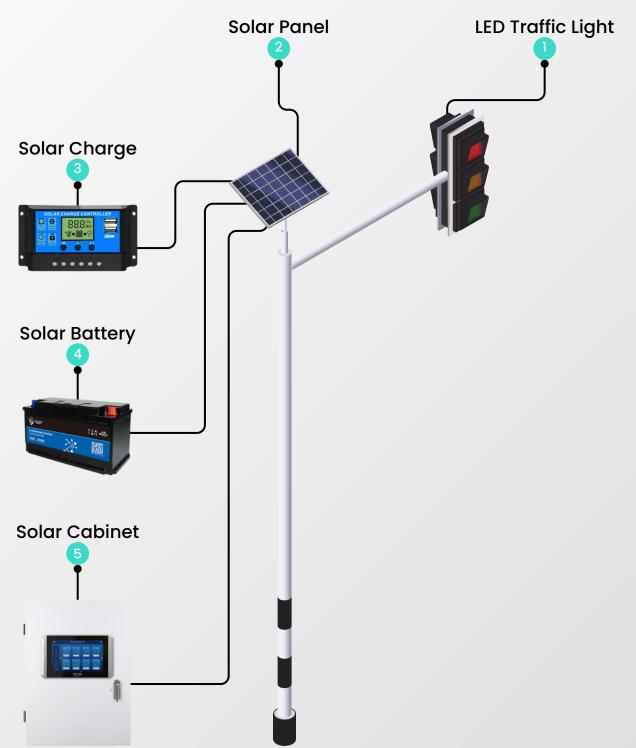













SOLAR TRAFFIC LIGHTS







SOLAR TRAFFIC LIGHTS












































































Our References



- İMTEK MÜHENDİSLİK
- HESA Group Energy
- GENA A.Ş
- SPIMEX ENDUSTRIYEL
- GEYLANİ ELEKTRİK
- UĞUR BETON METAL PLASTİK SANAYİ
- ODAK İNŞ.MÜH.MAD.SAN.VE TİC.A.Ş
- ANKAS TEDARİK İÇ VE DIŞ TİCARET LTD
- SAVRAN SAN HİZ TEM TAHM. TAH. TAŞE.
- İPEK DMS BASIM SANAYİ VE TİCARET A.
- YUNUSEMRE KARMA SANAYI SİTESİ
- BURSAN BURSA SANAYİ İŞLETMELERİ A. A
- İBER AMBALAJ SANAYİ VE TİCARET A.Ş
- MMC YAPI MİM.MÜH.İNŞ.ELEKT.MADENCİL.
- ER-EZ DOKUMA KUMAŞ TEKSTİL SANAYİ T.
- O.M.S ELEKTROMEKANİK MÜH.İNŞ.SAN.
- 2M SET YAPI ELEKTRİK İNŞAAT SAN.TİC
- BANAZ BELEDİYESİ TİCARET ANONİM ŞİR
- BARIŞ ISITMA SOGUTMA ELEKTRİK TESİS
- BEK-AY MİMARLIK DEKORASYON İNŞ.TİC.
- DEMAK GRUP İÇ VE DIŞ TİCARET A.Ş
- KONVEYÖR BEYAZ EŞYA VE OTOMOTİV YAN
- MEF OKULLARI VE ÖZEL EĞİTİM HİZMETLERİ
- BOREN ENDÜSTRİ KİMYA VE SAN.TİC.LTD
- ZBS ELEKTRONİK ELEKTRİK MEKANİK YAN
- MB KONVEYÖR BANT SANAYİ İÇ VE DIŞ T
- ERSAN MÜHENDİSLİK ELEK.İNŞ.SAN.
- STAR ALÜMİNYUM PAZARLAMA SANAYİ
- POLAT TRAFO TEKNOLOJİ ÜRÜNLERİ SAN.
- ERİNÖZ ELEKTROSTATİK TOZ BOYA
- KURUL GROUP DIŞ TİCARET ANONİM ŞİRK.
- BESOT MANİSA BELEDİYESİ MEŞ.MÜTE.MÜ
- EMSAN MÜHENDİSLİK ELEKTRİK ELEKTRON
- AKELSA AYDINLATMA ELEKTRİK ENERJİ
- CEM ENERJİ OTOMASYON TAAH. İNŞ

- LEDAVM AYDINLATMA SAN.VE TİC.LTD.ŞT
- MAYREK REKLAMCILIK TURİZM İN.TA.PAZ
- YUNTAŞ BETON ELEM.ASFALT İNŞ.SAN.VE
- YILDIZ TEK ELEKTRİK ENERJİ İNŞAAT S.
- CEM ENERJİ ELEKTRİK OTOMASYON TAAHH
- GİZMAK MAKİNA SANAYİ VE TİCARET ANO
- ELECSUS İNŞ.TU.AYD.EL.MALZ.İTH.İHR.
- KONVEYÖR BEYAZ EŞYA VE OTOMOTİV YAN
- SURTAŞ OTOMOTİV VE SERVİS HİZ.SAN.T
- ARÇELİK ÜRETİM VE TEKNOLOJİ A.Ş
- AYDOĞDU TEKNİK ELK. MÜH. TAH. SAN.
- MCC ELEKTROTEKNİK İNŞ. MÜH. SAN. VE
- BERİLAY AYDINLATMA MAHMUT GÜLEN
- AK PINAR GIDA SANAYİVE TİCARET ANO
- ORDU MOTORLU ARAÇLAR SAN.TİC.A.Ş.
- DEMOTO MOTORLU ARAÇLAR SAN. TİC. LT A
- ENERJEO KEMALİYE ENERJİ A.Ş.
- ENKA PLASTİK VE KALIP SAN.LTD.ŞTİ.
- FEKA İNŞAAT SANAYİ VE TİCARET A.Ş.
- ECO COLD SOĞUTMA SAN. VE TİC A.Ş
- DOYNE YAPI VE ENERİ MÜH. SAN. TİC.
- KLİMASAN KLİMA SAN. VE TİC. A.Ş.
- BONA MÜHENDİSLİK MAKİNA ELEKTRİK İN
- KONVEYÖR BEYAZ EŞYA VE OTOMOTİV YAN
- 2Y KABLO ELEKTRİK ELEKTRONİK İNŞ.
- STEELTEC ÇELİK A.Ş.
- EKO ENDÜSTRİ KALIP OTO PLASTİK VE S
- FEKA CONSTRUCTION CO
- MS VİDA MAKİNA SAN. VE TİC A.Ş.
- UYSAL MAKİNA-3 SAN. TİC.İHR. VE TİC
- MANİSA GENÇLİK VE SPOR İL MÜDÜRLÜĞÜ
- YOLCU KARDEŞLER GIDA TEM.SAN.TİC.LT
- WHITELED LIGHTING LED AYDINLATMA İT
- ENDOSA KALIP İTL. İH. SAN. TİC. A.Ş
- RAZMER TEKSTİL KONFEKSİYON SAN. VE

LICON ENERJI

COMMUNICATION

- **(** +90 236 233 88 67
- +90 530 434 90 06
- ☑ licon@licon.com.tr
- satis3@licon.com.tr
- www.licon.com.tr
- D. San. Sit. Atatürk Mah. 5962 Sk. No:10 Yunusemre/Manisa/Türkiye

